

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

#3
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

HYLAND et al

Serial No. 09/930,189

Filed: August 16, 2001

For: BINARY SEARCH TREES AND METHODS FOR
ESTABLISHING AND OPERATING THEM

* * * * *

Atty. Ref.: 922-144

Group: 2171

Examiner:

September 25, 2001

Assistant Commissioner for Patents
Washington, DC 20231

SUBMISSION OF PRIORITY DOCUMENTS

Sir:

It is respectfully requested that this application be given the benefit of the foreign filing date under the provisions of 35 U.S.C. §119 of the following, a certified copy of which is submitted herewith:

Application No.

0116541.4

Country of Origin

Great Britain


Filed

5 July 2001

Respectfully submitted,

NIXON & VANDERHYE P.C.

By:



Larry S. Nixon
Reg. No. 25,640

LSN:vc
1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100


THIS PAGE BLANK (USPTO)



4552
09/930,189



INVESTOR IN PEOPLE



RECEIVED

SEP 26 2001

Technology Center 2100

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 17 August 2001


THIS PAGE BLANK (USPTO)

4 July 2001
Page 1

06JUL01 E643328-1 002536
P01/7700 0.00-0116541.4

Patents Form No. 1/77

The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

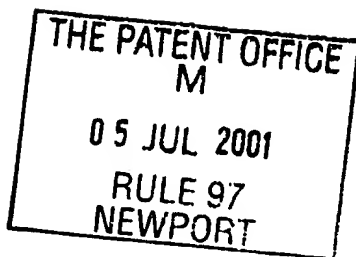

REQUEST FOR THE GRANT OF A PATENT

0116541.4

05 JUL 2001

The grant of a patent is requested by the undersigned on the basis of the present application:

1. Title of the invention: **BINARY SEARCH TREES AND METHODS FOR ESTABLISHING AND OPERATING THEM**

2. Applicants details:

First or only applicant: **3Com Corporation**

Country: **US** State: **Delaware**

Address: **5400 Bayfront Plaza
Santa Clara
California 95052-8145
United States of America**

7691009001

RECEIVED
SEP 26 2001
Technology Center 2100

3. Name of agent: **BOWLES HORTON** ADP Code: **8805003** ✓

Agent's address: **Felden House, Dower Mews
High Street, Berkhamsted
Hertfordshire HP4 2BL**

4. Agent's reference: **105368**

5. The application claims an earlier date under any of Sections 8(3), 12(6), 15(4) or 37(4): **NO**

6. Declaration of Priority (if any)

Country	Application Number	Priority date
NONE		

4 July 2001

Page 2

Patents Form 1/77 (continued)

7. Inventorship

The applicant(s) is/are the sole inventor or joint inventors: NO

8. Check List of Documents:

A. The application is accompanied by the following number of sheets:

Request:	1
Description:	14 ✓ <i>W</i>
Claims:	3 ✓
Abstract:	1 ✓
Drawings	12 + 12' (x2)

B. The application as filed is accompanied by the following:

Patents Form 7/77: YES ✓


Patents Form 9/77: YES ✓

Patents Form 10/77: YES ✓

Priority Document: NO

Translation of priority document: NO


9 Signature

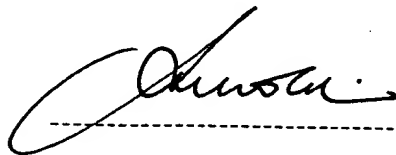

----- for BOWLES HORTON

Patents Form No. 7/77

The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent NO10 8QQ



STATEMENT OF INVENTORSHIP AND OF RIGHT TO THE GRANT OF A PATENT

Patent application No.(new) **0116541.4** **05 JUL 2001**

Title: BINARY SEARCH TREES AND METHODS FOR ESTABLISHING AND OPERATING THEM

I/We: 3Com Corporation


the applicants in respect of the above-mentioned application for a patent declare as follows:

(i) I/We believe that the person(s) whose name(s) and address(es) are stated on the reverse side of this form is/are the inventor(s) of the invention in respect of which the patent application is made;

(ii) the derivation of my/our right to be granted a patent upon the said application is as follows:

by virtue of the terms of employment of the inventors

(iii) I/We consent to the publication of the details contained herein to each of the inventors named on the reverse side of this form

Signature:  4 July 2001
for BOWLES HORTON (Authorised Agents)

Telephone: 01442 875961

Our reference: 105368

HYLAND, Kevin James

71 Castle Park

Clondalkin

Dublin 22/IE 8160301001

JENNINGS, Kevin

Caltralea

Ahascragh

Ballinasloe

Co. Galway/IE 8160319001

BINARY SEARCH TREES AND METHODS FOR ESTABLISHING AND OPERATING THEM

5 **Field of the Invention**

The present invention relates generally to binary search trees and methods of operating them, particularly although not exclusively to enable look-ups in packet-based communication networks, so as for example to provide forwarding information (such as a
10 port number of a switch) for a packet of which the address is stored in a lookup.

Background to Invention

One of the biggest bottlenecks in a switch design is the lookup process. A process called
15 hashing is commonly adopted whereby (for example) the MAC address of a device is encoded to a smaller value and stored in memory using that value as an address. Thereby rather than implementing a search of a 48bit number, the hashed value is used to retrieve the stored MAC address. However, often at least two different MAC addresses can hash to the same value and a linked list of entries under the same hashed MAC address must be
20 constructed, inferring an unpredictable latency to the switch. Statistically, the list increases rapidly the smaller the amount of memory available to store the addresses. One could have an example where there is a long list of entries at one hashed address despite the fact that there may be hashed addresses that have not yet been used.

25 A binary search tree is a data structure adopted predominantly in software, that yields an efficient algorithm for searching through a large database for a particular entry. The structure has a few key characteristics. For convenience, each location in the tree is termed a 'node' and the information contained therein is called an 'element'.

30 Every binary search tree has a unique root node separating two other binary search trees. These two binary trees are disjoint from each other and from the root node and are called the left and right subtrees of the root. These subtrees are themselves binary search trees in their own right. Each time one moves from a node to one of its subtrees, a 'level' in the tree is

traversed. If a binary search tree has L levels, the root node is the only node to be a member of level L , the uppermost level. A full binary tree with L levels has $(2^L)-1$ nodes.

Inherent in the levels of the tree is a hierarchical structure. For any node at some level X , there is a unique 'parent' node at level $X+1$ and two 'children' at a level $X-1$.

Searching the tree can be optimised by the following rules applied at any node with element B .

- a) If A is ANY element in the left subtree of B , then A is less than B .
- b) if C is ANY element in the right subtree of B , then C is greater than B .

For a given number of nodes there is an associated minimum tree depth that yields maximally efficient searches for any given element of that tree. A tree whose depth is minimal for a given number of entries is called a 'balanced' tree. However, in compiling a tree from a succession of, for example, randomly occurring values within a range that is to be encompassed by the tree, the tree is likely to be unbalanced, especially if implemented in hardware.

If a binary tree is (as is usual) implemented in software the hierarchy of the tree is formed by linking nodes, with pointers, to other nodes. Along with the actual element, two pointers are also contained at every node, one to the memory location of the left subtree and one to the right subtree. As usual, 'pointers' are simply memory addresses. In hardware, storing this kind of information occupies unnecessary area on a chip, often a more critical aspect of design than the latency of a lookup process. However, latency is also an important consideration in hardware designs especially in time critical applications.

Summary of the Invention

The present invention is based on the dynamic construction of pointers to neighbouring nodes using simple logic, saving the area otherwise needed to store these pointers statically for every node in the tree.

A tree implemented in accordance with the invention is always balanced because every new element is inserted at the "highest" available node in the hierarchy of the tree. Thus for a full tree of L levels, there is a worst case of L possible comparisons before the search element can be located.

A binary search tree according to the invention offers a deterministic minimal search latency for any element (such as a MAC address) stored in one of its nodes because (a) every memory address points to one other element only; and (b) the search algorithm adopted to find an address in the database has a fixed worst case value fixed by the size of the lookup memory available. The invention is therefore particularly suited for implementation in hardware with minimal memory.

Further objects and features of the invention will be apparent from the following detailed description with reference to the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a schematic illustration of a network switch.

Figure 2 illustrates a software structured balanced binary search tree.

Figure 3 illustrates a software structured unbalanced binary search tree.

Figure 4 illustrates part of an insertion process.

Figure 5 illustrates the result of a shuffling process.

Figure 6 illustrates memory locations restructured as a binary search tree.

Figure 7 illustrates the general structure of a binary search tree with level decode.

5 Figure 8 illustrates a searching flow algorithm.

Figure 9 illustrates neighbouring code locations in a binary search tree.

Figure 10 illustrates a search path for finding a highest available new node.

10

Figures 11 and 12 illustrate a flow chart algorithm for inserting new elements.

Figure 13 illustrates a flow chart for a deletion algorithm.

15

Detailed Description

Figure 1 illustrates, for the sake of a specific example, one form of device within which a binary search tree may be used in accordance with the invention. The example given is of an otherwise well known form of switch which can be used in a packet-based communication system conforming for example to an Ethernet protocol and particularly IEEE Standard 802.3 (1998 Edition). In view of the generally well known nature of the switch, which in practice is of considerable complexity, the switch shown in Figure 1 has been deliberately simplified.

20

25 The switch 1 shown in Figure 1 has a multiplicity of ports 2. In practice there are many more ports than the four shown. These ports are capable of receiving addressed data packets or other frames from a communication medium and also transmitting addressed data packets. The ports are coupled to media access control (MAC) devices 3 which are intended to be in well known form. Packets received by any of the ports are, after appropriate pre-
30 processing passed by way of a memory bus system, coupled to a CPU 5, to a memory controller 5 controlling reading and writing in a memory 7 which may be located 'on-chip' but may be off-chip according to preference. Coupled to the bus system is a look-up engine 8 having access to a look-up database 9. In practice the look-up engine 8 may be part of the

30

processing system represented by the CPU 5 but depending on the organisation of the switch there may be a multiplicity of look-up engines, a multiplicity of processors and so on. A typical example of a modern, complex multi-chip switch, wherein there are mutually coupled look-up engines and network processors, is described in the earlier GB patent application 0102310.0 filed 30 January 2001. Another form of switch, particularly one in which the various operational cores, such as the MAC's and CPU, exchange data only by way of memory is described in co-pending application No. 0113584.7 filed 5 June 2001. However, there are many forms of network switch with their own particular architecture and it is not intended to limit the present invention to any particular form of switch.

One process which the switch commonly has to perform is a look-up based on address data within a received packet in order to determine the destination or group of destinations to which a packet or replicas of a packet should be forwarded. The look-up database 9 is used for this purpose. Typically it comprises a multiplicity of entries at specific memory locations, the entries including 'associated data' which (among other things) includes the forwarding data for the relevant packet. Typically the forwarding data identifies, for example by means of a bit mask, the particular ports from which a packet having the particular destination address should be forwarded. This look-up process is commonly known as a 'destination address look-up'.

A look-up database of this nature is commonly at least partly established by performing an additional look-up, known as a source address look-up, wherein, for example, the look-up database is examined to see whether there is an entry corresponding to the source address of an incoming packet. If there is no such entry, a new entry can be made including an identification of the port on which the packet having that source address was received.

It will be understood by those skilled in the art that this is a brief description of a process which can involve other operations, having regard to forwarding rules in the network, VLAN membership, spanning tree algorithms, trunking rules and so on.

The relationship between a packet and the entry in the look-up database is exemplified as follows. A packet usually has a preamble, MAC address data, typically including a 48-bit destination address and a 48-bit source address, a further section, which may include

control data, VLAN data, network (layer 3) addresses and so on, a message section (comprising the data 'payload' of the packet) and a cyclic redundancy code section. Typically, there is a search made on part of the MAC address data to locate a corresponding element or entry in the look-up database, this entry providing access to associated data.

5

There is quite a variety of ways in which the search can be organised, both in hardware and software. The principal problem is that the address data or search key is commonly very long (typically 48 bits) and the number of different entries that may have to be made may be very large. Considerable effort has been devoted to the achieving of efficient, large capacity, search structures and algorithms.

10

In these and other circumstances the binary search tree offers a convenient and deterministic minimal search latency because every memory address is associated with a single MAC address and the search algorithm has a fixed worse case value fixed by the size of the look-up memory available.

15

Figure 2 schematically represents a balanced binary search tree which is structured in software. Each node (except the final 'leaf' nodes) has two pointers to the left and right. A binary search is made by comparing the value of the key with the element at the root node. The search terminates if the key is equal to that element, which is 50 in the example. If the key is not equal to the element then one or other of the nodes identified by the pointers is accessed next, depending on whether the key is greater or less than the element at the examined node.

20

Each entry includes or has a pointer to associated data (not shown in Figure 2) as well as a left pointer and a write pointer, which in accordance with ordinary practice are merely addresses in which the elements of the adjacent nodes are stored.

25

It is desirable to achieve a balanced tree in order to minimise the number of operations required to achieve a match between the key and the address data in the entry.

30

It should be understood, in relation to Figure 2, that the actual location in memory of the entries shown is unimportant except for the root node. A search is made by comparing the

address (or key) with the element in the root node. If there is identity, the search ends immediately. The search proceeds down the left tree if the key is less than the element in the root node and down the right tree if the key is greater than the element in the root node. Thus for example when searching the tree in Figure 2, if the key is less than 50 the next stage of the search is directed by the left pointer to the entry '20'. On the contrary, if the address key is greater than '50' the right pointer will be used to access the node shown with element '90' and a further stage of comparison occurs and so on.

Figure 2 is balanced, with the same depth of tree both to the left and to the right of the root node because it is constructed ex post facto, it being known that '50' is the middle value of the elements. In practice, unbalance occurs owing to the fact that the entries may have to be compiled in an uncontrolled order. This is shown in Figure 3. The root node is established first and contains the element 90. Thus it will be seen that the number of nodes and the depth of the tree is greater on the left-hand side of Figure 3 than the right-hand side. If for example the next entry had an element '24', the tree would be traversed down to the node having address key '27' and would be established using the left pointer available for that node, making the tree further unbalanced. The unbalance will occur if the elements that are established after the root node are preponderantly greater (or less) than the element at the root node.

In order to alleviate delays caused by unbalanced trees, it is known to 'shuffle' the elements in the nodes. This is shown in Figures 4 and 5. In Figure 4, node 40 contains element '50' and node 41 contains element '20'. Node 42, the other 'child' of node 40, is the highest (in terms of levels) available node. If the next element to be stored in '2', less than the element in node 41, it will be put in one of the child nodes of node 41, tending to unbalance the tree. It is known to perform a shuffling operation as shown in Figure 5, wherein node 41 becomes the root node and node 40 a child of the root node. The new element '2' is put into node 43 and the tree is balanced.

Figure 6 illustrates an array 60 of standard hardware memory locations, each defined by a multiple binary word. The array 60 of memory locations can be organised as a binary tree 61 from a root node 62. The tree 61 has nodes corresponding to the addresses in array 60

and except for the leaf nodes (i.e. at the lowest level) each node has two child nodes of which the addresses can simply be computed from their parent node.

Figure 7 illustrates a binary search tree which is provided with an explicit hierarchy represented by a 'level decode'. Each address has a binary size of L bits, usually represented conventionally as [L-1:0]. Shown adjacent the tree 71 in Figure 7 is a decoding scheme 72 identifying each level from 0 to L with the address of the first node at the respective level. Owing to its binary nature, a tree with L levels may be constructed with a number of locations corresponding to $(2^L) - 1$.

It should be noted that in Figure 7 the tree 71 has a predetermined structure such that for each level, each node has two child nodes of which the right-hand node has an address greater than the address of the left-hand node and each is simply computable from the address of the parent node. Thus for example the address [0100...0] of node 72 can generate the address [0010...0] of node 73 and the address [0110...] of node 74 by diminishing and augmenting respectively the address of node 72 by the binary value 2^m where m is one fewer than the level of the parent node, in accordance with the ordering of a binary tree.

Knowing the level for any node of interest allows the calculation of 'pointers' to neighbouring nodes. Knowing these will in turn allow the implementation of simple algorithms which are used to search for an element and for inserting and deleting new elements in the tree and which can be performed by hardware logic. These pointers are not stored on a per node basis; they are dynamically calculated when needed.

Accordingly, if the tree is structured as shown in Figure 7, then the flow algorithm employed in Figure 8 may be used when searching for an element. In this and the other flow diagrams a single equals sign represents the action 'set (parameter) equal to (stated value)' so that for example in the first stage 80 the variable 'current node' is set to the root node and the variable 'current level' is set to the number of levels. The double equals sign represents the discovery of identity, so that for example in stage 83, a test is made to determine whether the current level is identical to zero.

According to the flow algorithm in Figure 8, the comparison stage 81 discovers whether the current element is identical to the key or search element. If the current element is identical to the search element then the element has been found (stage 82) and, in the specific example, the associated data is retrieved. If the current element is not identical to the search element, then a test is made (stage 83) whether the current level is identical to zero. If it is, then the search has been completed unsuccessfully and the element is not found in the search table. If the current level is not identical to zero, the next test (85) is whether the current element is greater or less than the search element. This is the basic stage of a binary search tree. The search is then directed either to the left child node or the right child node according to whether the current element is less than or greater than the search. By virtue of the structure just discussed, the 'current' node is set to the appropriate child node and the 'current' level is decreased by unity. The search reverts to stage 81 and so on.

It is worth mentioning here that the tree structure and the level decoding allow the computation of nodes neighbouring a randomly selected node and also allow the determination whether a node is the first or last at a given level.

Consider a randomly selected node, n , at memory address, $\text{currentNode}[L:0]$.

a) $\text{currentLevelDecode}$: Knowing the level at which a node resides, say X , one calculates a decode of it as follows:

$\text{currentLevelDecode}[L:X+1] = 0$

$\text{currentLevelDecode}[X] = 1'b1$

$\text{currentLevelDecode}[X-1:0] = 0$

b) The parent node is the node immediately above a randomly selected node. The only node not to have a parent is the root node.

$\text{parent}[L:0] = ((\sim \text{currentLevelDecode}[L:0]) \& \text{currentNode}[L:0]) | (\text{previousLevelDecode}[L:0])$

c) The RightChildNode is the node which resides to the right of a randomly selected node. The element of the right child node is greater than the element contained at node n.

rightChildNode[L:0] = currentNode[L:0]||nextLevelDecode[L:0].

5

d) The LeftChildNode is the node which resides to the left of a randomly selected node. The element of the left child node is less than the element contained at node n.

leftChildNode[L:0] = currentNode[L:0]||nextLevelDecode[L:0].

10

e) previousLevelDecode = the level at which a node's parent resides, decoded.

previousLevelDecode[L:0] = currentLevelDecode[L:0]<<1

f) nextLevelDecode = the level at which a node's child/children reside, decoded.

15

nextLevelDecode[L:0] = currentLevelDecode[L:0]>>1

g) nextLocationOnLevel: The next location on a level is the node directly to the right of n.

nextLocationOnLevel[L:0] = currentLocation[L:0] + previousLevelDecode[L:0]

20

h) lastNodeAtLevel: The last node on the level at which n resides.

lastNodeAtLevel[0] = currentLevelDecode[0];

lastNodeAtLevel[1] = currentLeveldecode[1]||lastNodeAtLevel[0];

25

lastNodeAtLevel[2] = currentLeveldecode[2]||lastNodeAtLevel[1];

lastNodeAtLevel[3] = currentLeveldecode[3]||lastNodeAtLevel[2];

lastNodeAtLevel[L] = currentLeveldecode[L]||lastNodeAtLevel[L-1];

30

i) firstNodeAtLevel: The first node on the level at which n resides.

firstNodeAtLevel[L:0] = currentLevelDecode[L:0].

The relationships between the nodes are summarized in Figure 9.

Figure 10 illustrates the pattern for the search for new unoccupied nodes when inserting a new element. The search commences at the root node 101, then proceeds along the next level (L-1) for nodes 102 and 103, then proceeds along the next level (L-2) that is to say nodes 104 to 105 and so on to the next level of which the first node is 106 and the last node of the level is 107. At each level a test can be made in accordance with the foregoing to determine whether the node is the last node on that selected level so that a next level decode performed will produce a pointer to the first node (for example 102, 104, 106) on the next level down. In the Figure, node 108 may be termed the 'base' node, the first node of the lowest level and node 109, shown with an address of all ones, is the terminating node.

The remaining Figures are flow diagrams illustrating the operation of hardware logic for (a) inserting new elements in the binary tree and (b) deleting elements from the tree. In a specific embodiment the nodes constitute, or form part of, the look-up database 9 in Figure 1 and the logic engine performing the insertion and deletion processes as well as the search process described in Figure 8 forms part of the look-up engine 8 in Figure 1.

Figure 11 is a flow chart of an algorithm for the insertion of new elements. It commences with stage 111, which the 'current' node, that is to say the node in respect of which operations are being performed, is set to the root node. The other parameter which needs setting is the 'current level' which is set to the number of levels in the tree (L).

Stage 112 is a test whether the current element (the element stored at the current node) is zero. If it be zero, the procedure described in Figure 12 will be followed. This is described later.

If the current element stored at the current node is non-zero, the algorithm tests whether the current node is the last node at the level (determined as previously described). If the current node is the last node at the level there is a further test 114 to determine whether the current level is zero (the lowest level of which node 108 is the base and node 109 is the terminating node).

If the current level is zero as determined by stage 114, there is no free space, as indicated by stage 115. The algorithm has reached node 109 as shown in Figure 10.

5 If the test 114 indicates that the current node is the last node at the level and the current level is non-zero, then the current level must be decremented (stage 116) and the current node set to the current level decoded (stage 117). This will direct the insertion process to the first node in the next level.

10 If tests 113 indicate the current node is not the last node at the level, then the current node is reset to be the next location on the level, stage 118, and the algorithm reverts to stage 112.

Figure 12 illustrates the insertion process in the event that the current node is set to the root node and the current element is zero. The process in Figure 12 includes a shuffling algorithm. Stage 120 defines 'writeNode' as equal to the current node, in preparation for a writing operation. Stage 121 is a test for the current node being the root node. If it is, then the new element is written into the node, stage 134 and the process ends (stage 135).

20 If the current node is not the root node then a test (123) must be made to determine whether the parent element (the element stored in the parent of the current node) is greater than the current element.

If the parent element is greater than the current element, the next test is whether the current node is equal to the base node, stage 124.

25 If the current node is not equal to the base node (124), the current node is set (stage 125) to one fewer than the current node. If the current element is non-zero (stage 126), and the current element is less than the new element (stage 127), then the write element is the current element and the write node is the current node (stage 128).

30 If the parent element is greater than the current element and the current node is not equal to the terminating node (stage 129) the current node is set (stage 130) to one more than the current node. If the current element is non-zero (stage 131), and the current element is greater than the new element (stage 132) then the new element is written (134) and the

process ends (stage 135). If the current element is not greater than the new element then the write element is set to the current element, the write node is set to the current node (stage 133) and this sub-process recycles.

5 A specific example of the insertion of four elements in an initially unoccupied trie now follows. It is assumed that the elements are x_1 to x_4 where $x_1 > x_2 > x_3 > x_4$. In each case the stages shown in Figures 11 and 12 are listed, with the result (Yes or No) given for each test in the path. For the sake of simplicity it is assumed that the search tree has only three levels, e.g. a root node, level 2, two nodes at level 1 and four nodes at level 0, so that the first node at the last-mentioned level is the base node. This tree corresponds to nodes 101 to 105 in Figure 10 (identifiable with 3-bit addresses).

10 (a) Element x_1 : stages 111-112 (YES) - 120 - 121 (YES) - 134-135. Thus x_1 is stored at the root node.

15 (b) Element x_2 : stages 111 - 112 (NO) - 113 (YES) - 114 (NO) - 116 - 117 - 112 (YES) - 120 - 121 (NO) - 123 (YES) - 124 (NO) - 125 - 126 (YES) - 124 (YES) - 134 - 135

x_2 is stored in the leftChildNode of the root node.

20 (c) Element x_3 : stages 111 - 112 (NO) - 113 (YES) - 114 (NO) - 116 - 117 - 112 (NO) - 113 (NO) - 118 - 112 (YES) - 120 - 121 (NO) - 123 (YES) - 124 (NO) - 125 - 126 (YES) - 124 (NO) - 125 - 126 (NO) - 127 (NO) - 128 - 124 (NO) - 125 - 126 (YES) - 124 (NO) - 125 - 126 (NO) - 127 (NO) - 128 - 124 (NO) - 125 - 126 (YES) - 124 (YES) - 134 - 135

25 x_3 is stored in the rightChildNode of the root node, thereby maintaining the balance of the tree.

(d) Element x_4 : stages 111 - 112 (NO) - 113 (YES) - 114 (NO) - 116 - 117 - 112 (NO) - 113 (NO) - 118 - 112 (NO) - 113 (YES) - 114 (NO) - 116 - 112 (YES) - 120 - 121 (NO) - 123 (YES) - 124 (YES) - 134 - 135.

x_4 is stored in the baseNode of the tree.

5

Figure 13 is a flow chart for a deletion algorithm. This is not essential to the invention in its broadest form but, particularly in the context of the switch it is desirable to be able to remove entries selectively, for example as part of an 'ageing' process in which new entries (e.g. MAC addresses) are given a 'time stamp' (e.g. a number in a recycling series) and at appropriate intervals entries which are too old by comparison of the time stamp with the state of an ageing clock are removed, to make additional room for new entries.

10

The deletion process begins at stage 150 to set current node to 'delete node' and a 'checking-up' flag to zero. Stage 151 is a test to determine whether the node to be deleted is at level zero. If it is, then without further tests the element is set to zero (152) and deleted (153).

15

If the node is not at level zero then stage 154 augments the current node. If the current element is zero (155), then stage 158 tests whether the parent node is equal to the delete node. If it is not, the current node is set to the parent node and tests 155, 158 and 159 recur. If the parent node is equal to the delete node then after stage 160, a monitoring stage, and there is a check-up, the current element is set to zero (162) and the element is deleted (163). If the check-up has not been made, then the check-up is set to the current node is decremented by unity and the process reverts to stage 155.

20

25

CLAIMS

1. A binary search tree comprises:

5 a multiplicity of address nodes each operable to store a data element, the nodes having pre-determined addresses and organised in a multiplicity of levels, the nodes including a root node and for each level except the nodes a lowest level two child nodes for each node in the immediately lower level, whereby the address of each child node is computable from the address of the respective node having that child node; and

10 a hardware engine for the insertion of elements in the nodes, said hardware engine being operable to make a search for the highest available node for the insertion of a new element and to search in a pattern in which all the nodes at each level beginning at the highest are searched before the search continues to the next lower level.

15 2. A binary search tree according to claim 1 wherein for each current node in said search the search comprises:

20 (a) determining whether a non-zero element is stored at the current node;

(b) determining, in the event that said non-zero element is stored, whether the current node is the last node at a current level of the tree;

25 (c) determining, if said current node is said last node, whether the current level is the lowest level of the tree;

(d) decrementing, if said current level is not the lowest level, the current level of the search and changing the current node to the first node of the next lower level of the tree; and

30 (e) setting, if said current node is not the last node at the current level, the current node to be the next node at the same level

3. A binary search tree according to claim 2 wherein said engine, when the current node is available for the storage of a new element, causes the writing of a new element.

4. A binary search tree according to claim 2 wherein said engine, when said current node is available for the storage of a new element, is operative:

(i) to insert the new element if the current node is the root node, or when the current element is not the root node;

10 (ii) to determine whether the new element is greater or less than the element stored at the parent node of the current node and to increment or decrement the current node respectively;

15 (iii) to insert the new element in accordance with an examination of the availability of the current node and a comparison of the magnitudes of the new element and the current element if any stored at the current node.

5. A method of establishing entries in a binary search tree, said binary search tree comprising a multiplicity of address nodes each operable to store a data element, the nodes having pre-determined addresses and organised in a multiplicity of levels, the nodes including a root node and for each level except the nodes a lowest level two child nodes for each node in the immediately lower level, whereby the address of each child node is computable from the address of the respective node having that child node;

25 said method comprising examining the nodes in a predetermined pattern to find a highest available node, said pattern requiring all the nodes at each level beginning at the highest to be examined before any node in the next lower level is examined.

6. A method according to claim 6 wherein said method comprises, for each current node that is examined:

30 (a) determining whether a non-zero element is stored at the current node;

(b) determining, in the event that said non-zero element is stored, whether the current node is the last node at a current level of the tree:

5 (c) determining, if said current node is said last node, whether the current level is the lowest level of the tree:

(d) decrementing, if said current level is not the lowest level, the current level of the search and changing the current node to the first node of the next lower level of the tree; and

10 (e) setting, if said current node is not the last node at the current level, the current node to be the next node at the same level.

ABSTRACT

5

A binary search tree including a multiplicity of nodes having pre-determined addresses and organised in a multiplicity of levels, and a hardware engine for the insertion of elements in the nodes, being operable to make a search for the highest available node in a pattern in which all the nodes at each level beginning at the highest are searched before the search continues to the next lower level.

10

15

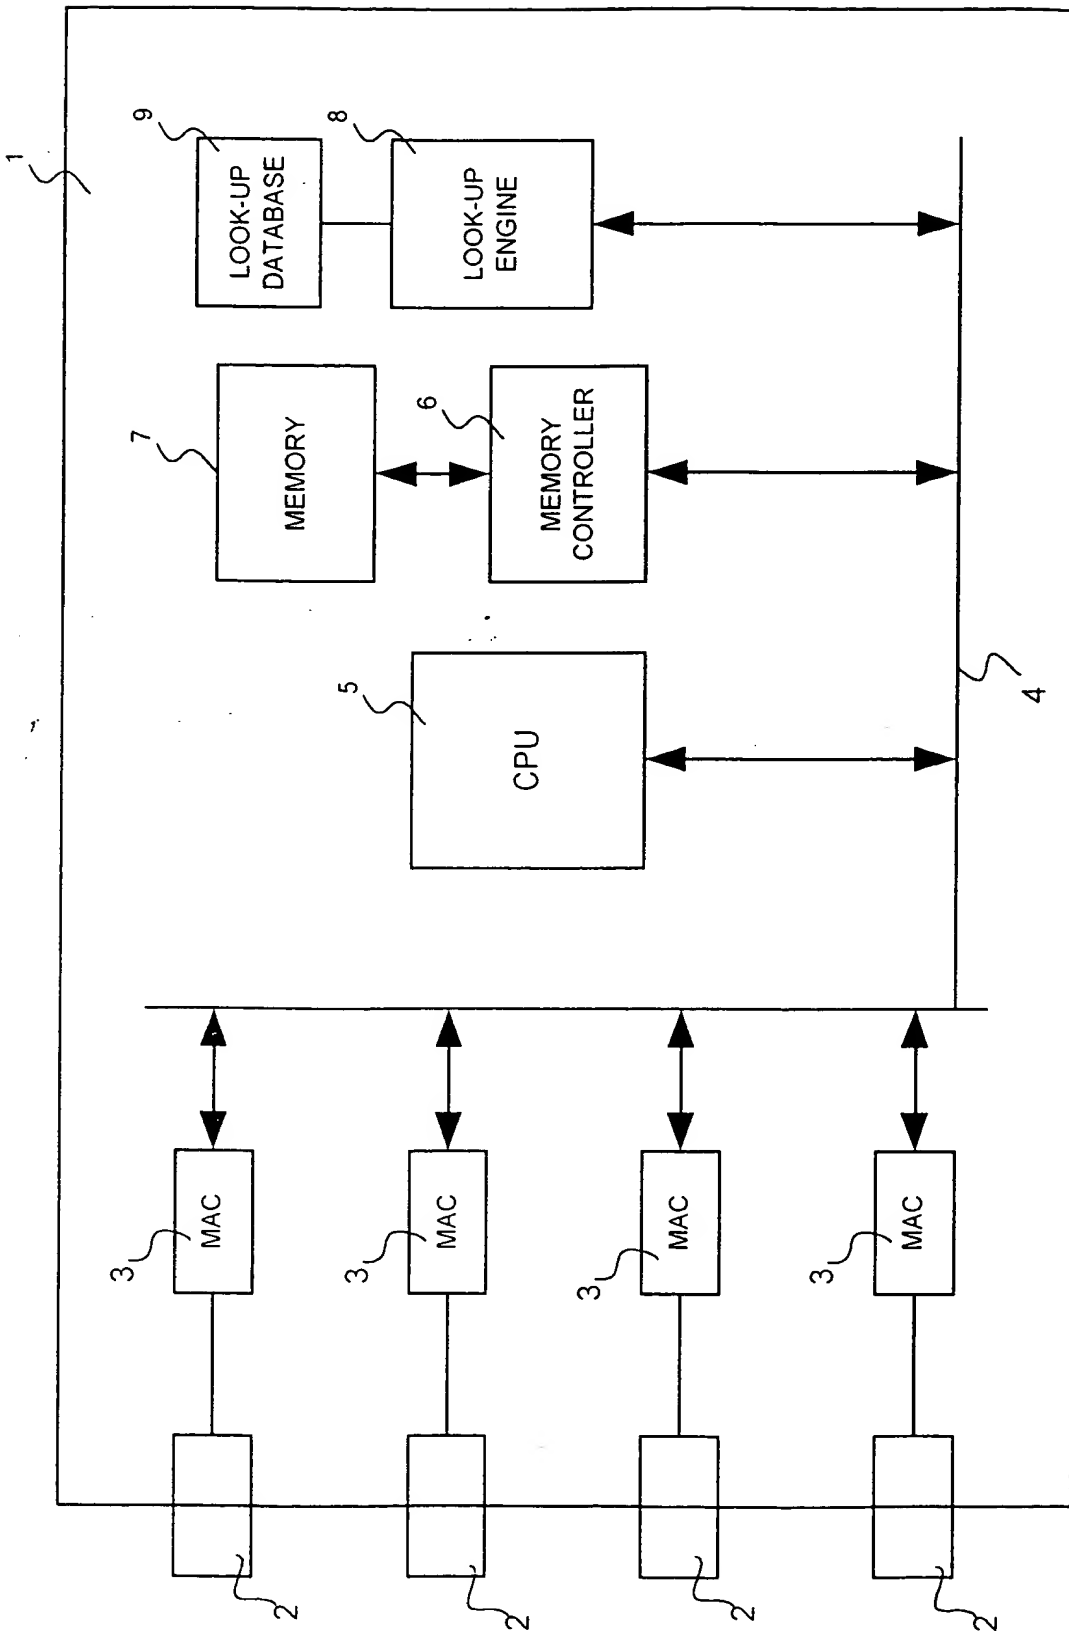


FIG.1

THIS PAGE BLANK (USPTO)

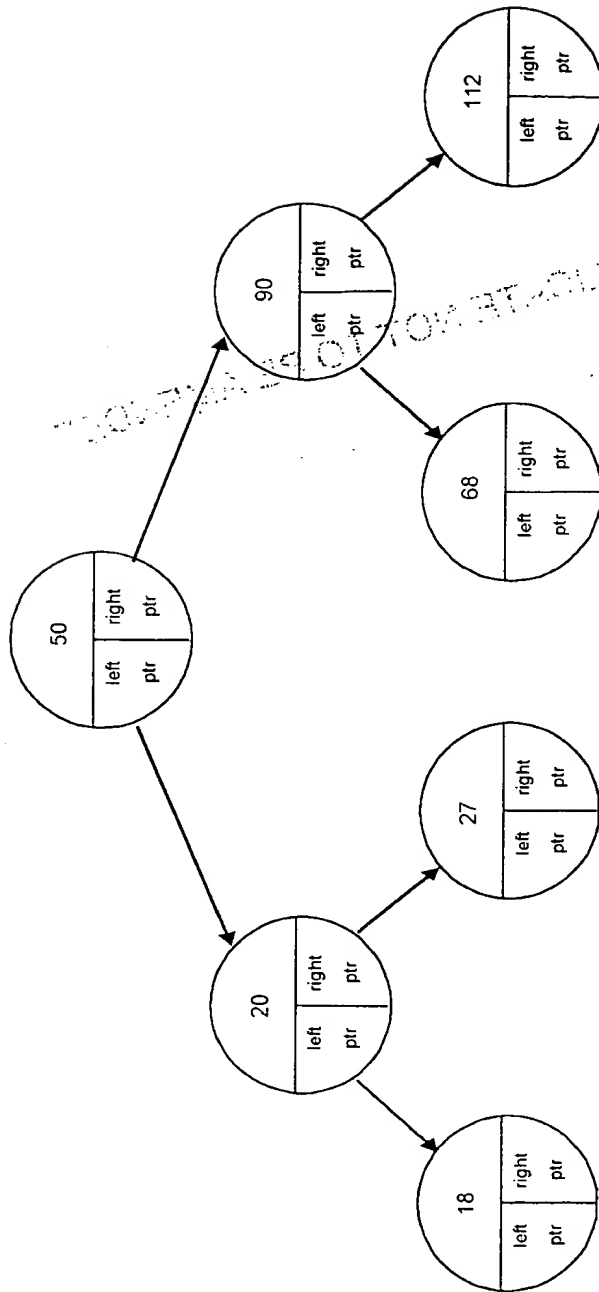


FIG.2

THIS PAGE BLANK (USPTO)

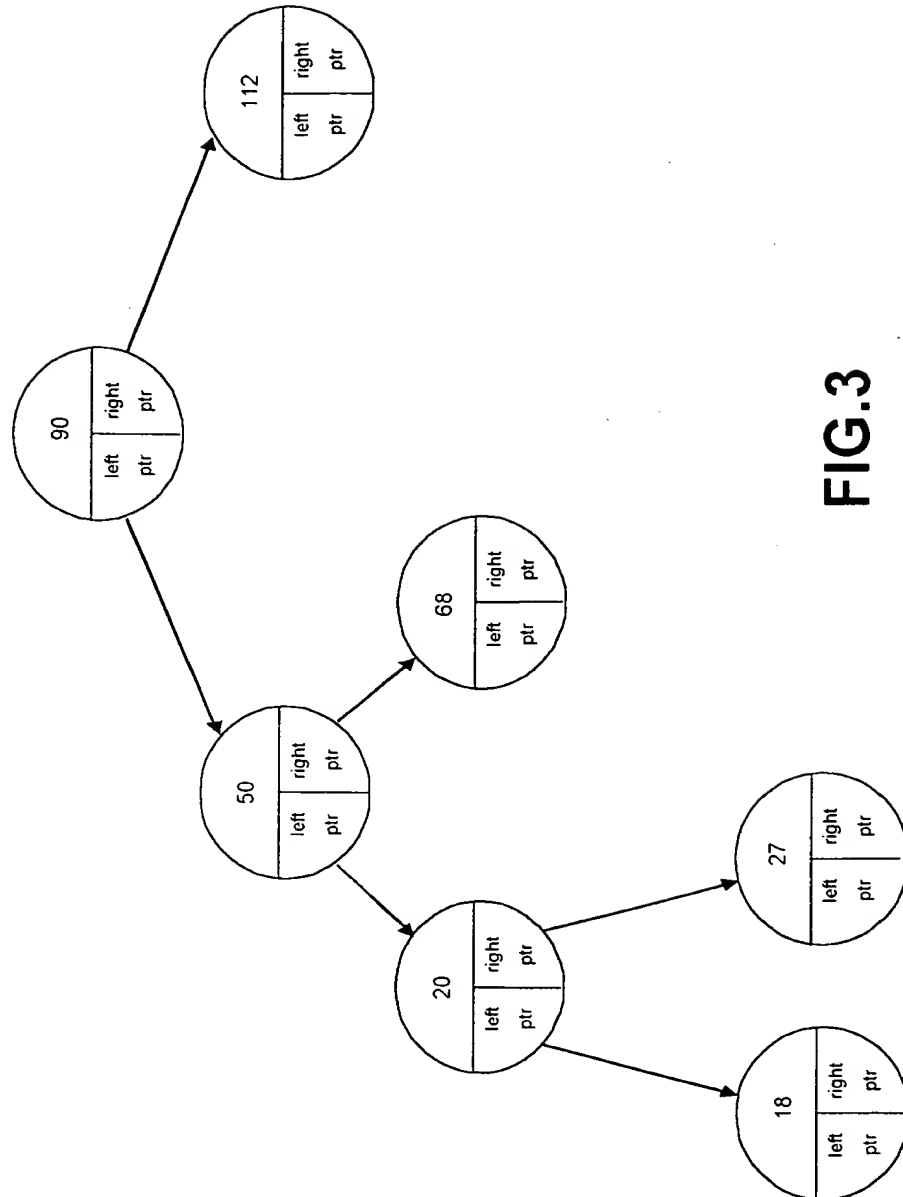


FIG.3

THIS PAGE BLANK (USPTO)

4/12

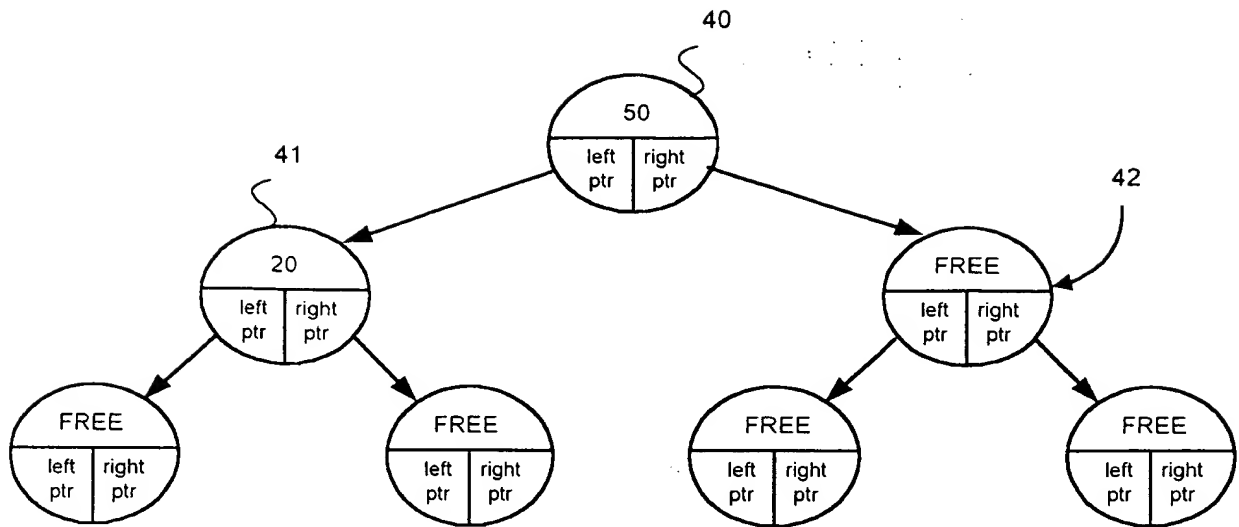


FIG.4

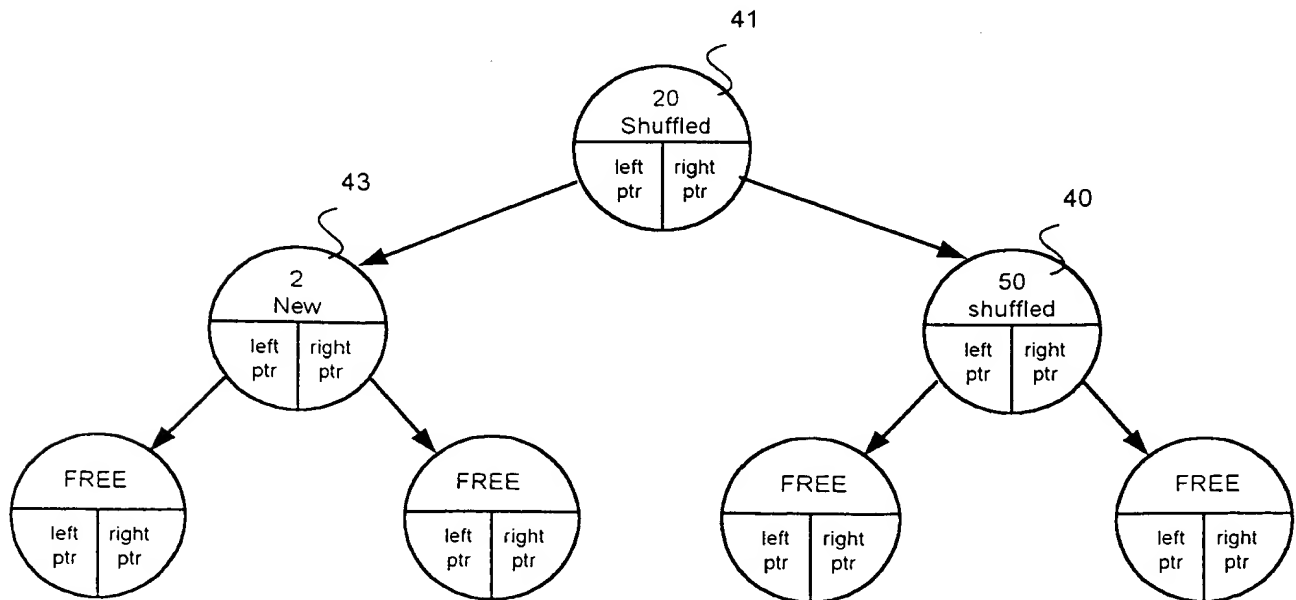


FIG.5

THIS PAGE BLANK (USPTO)

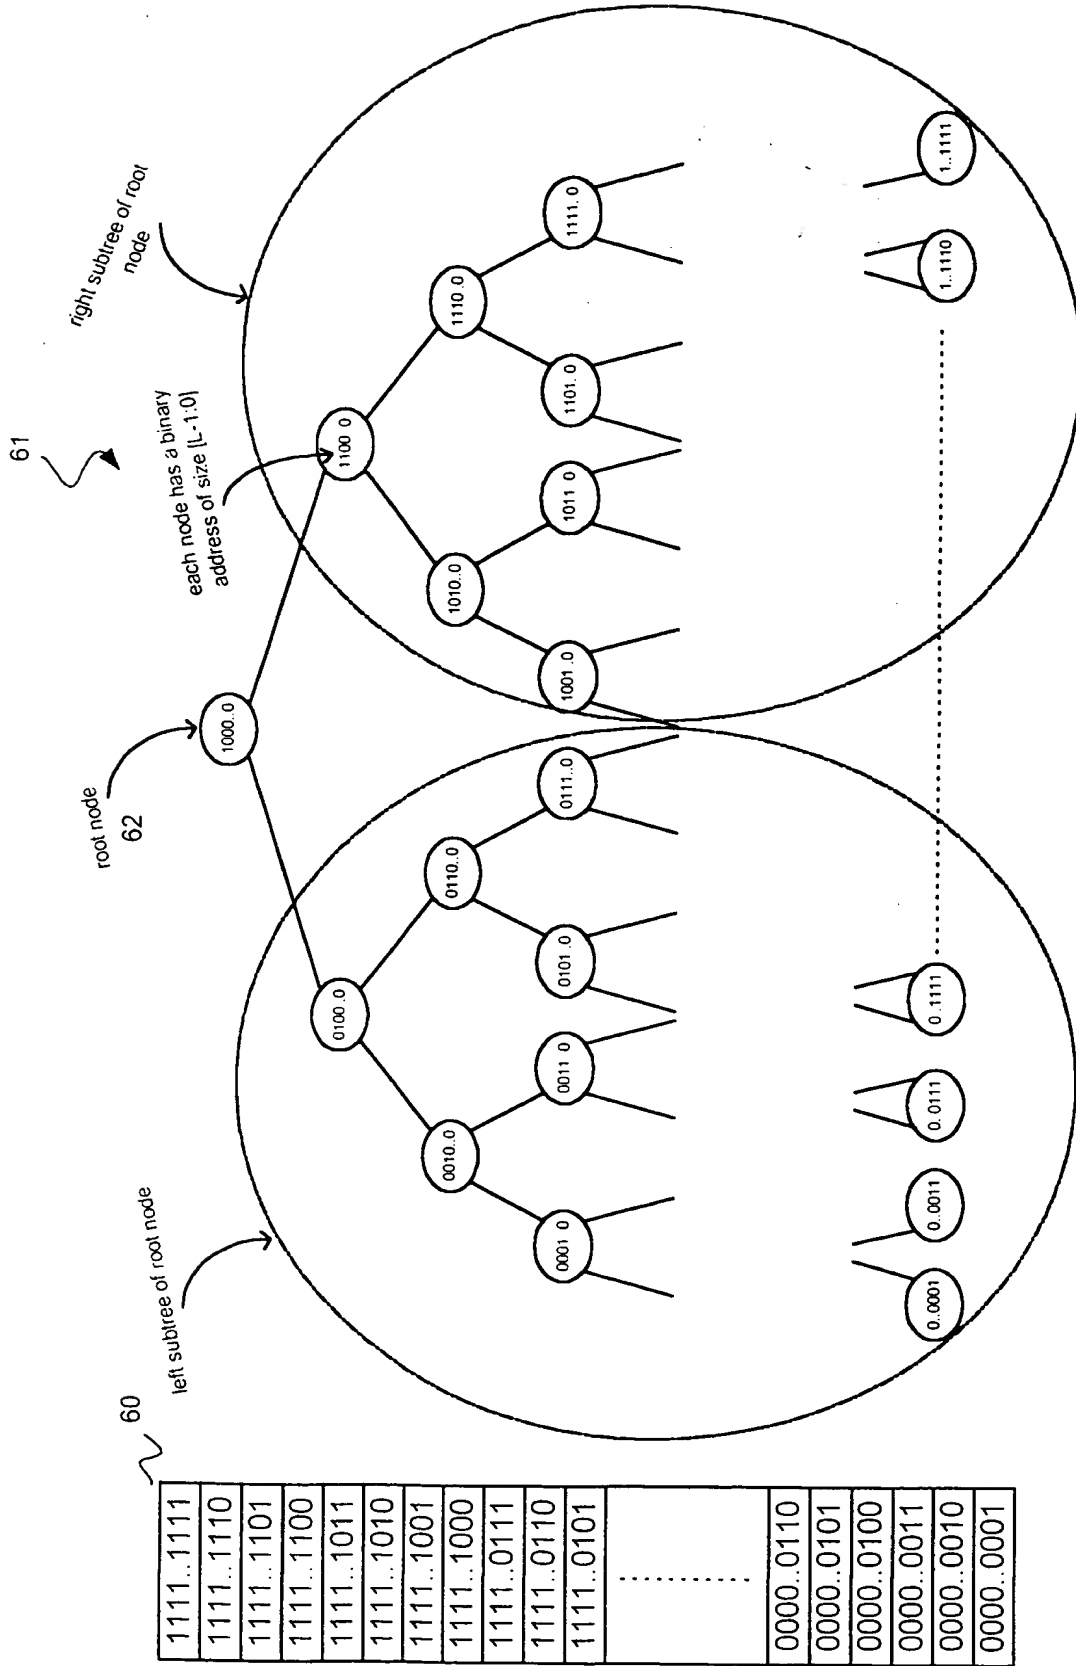


FIG.6

THIS PAGE BLANK (USPTO)

General Structure of an L Level Binary search Tree with level decode.

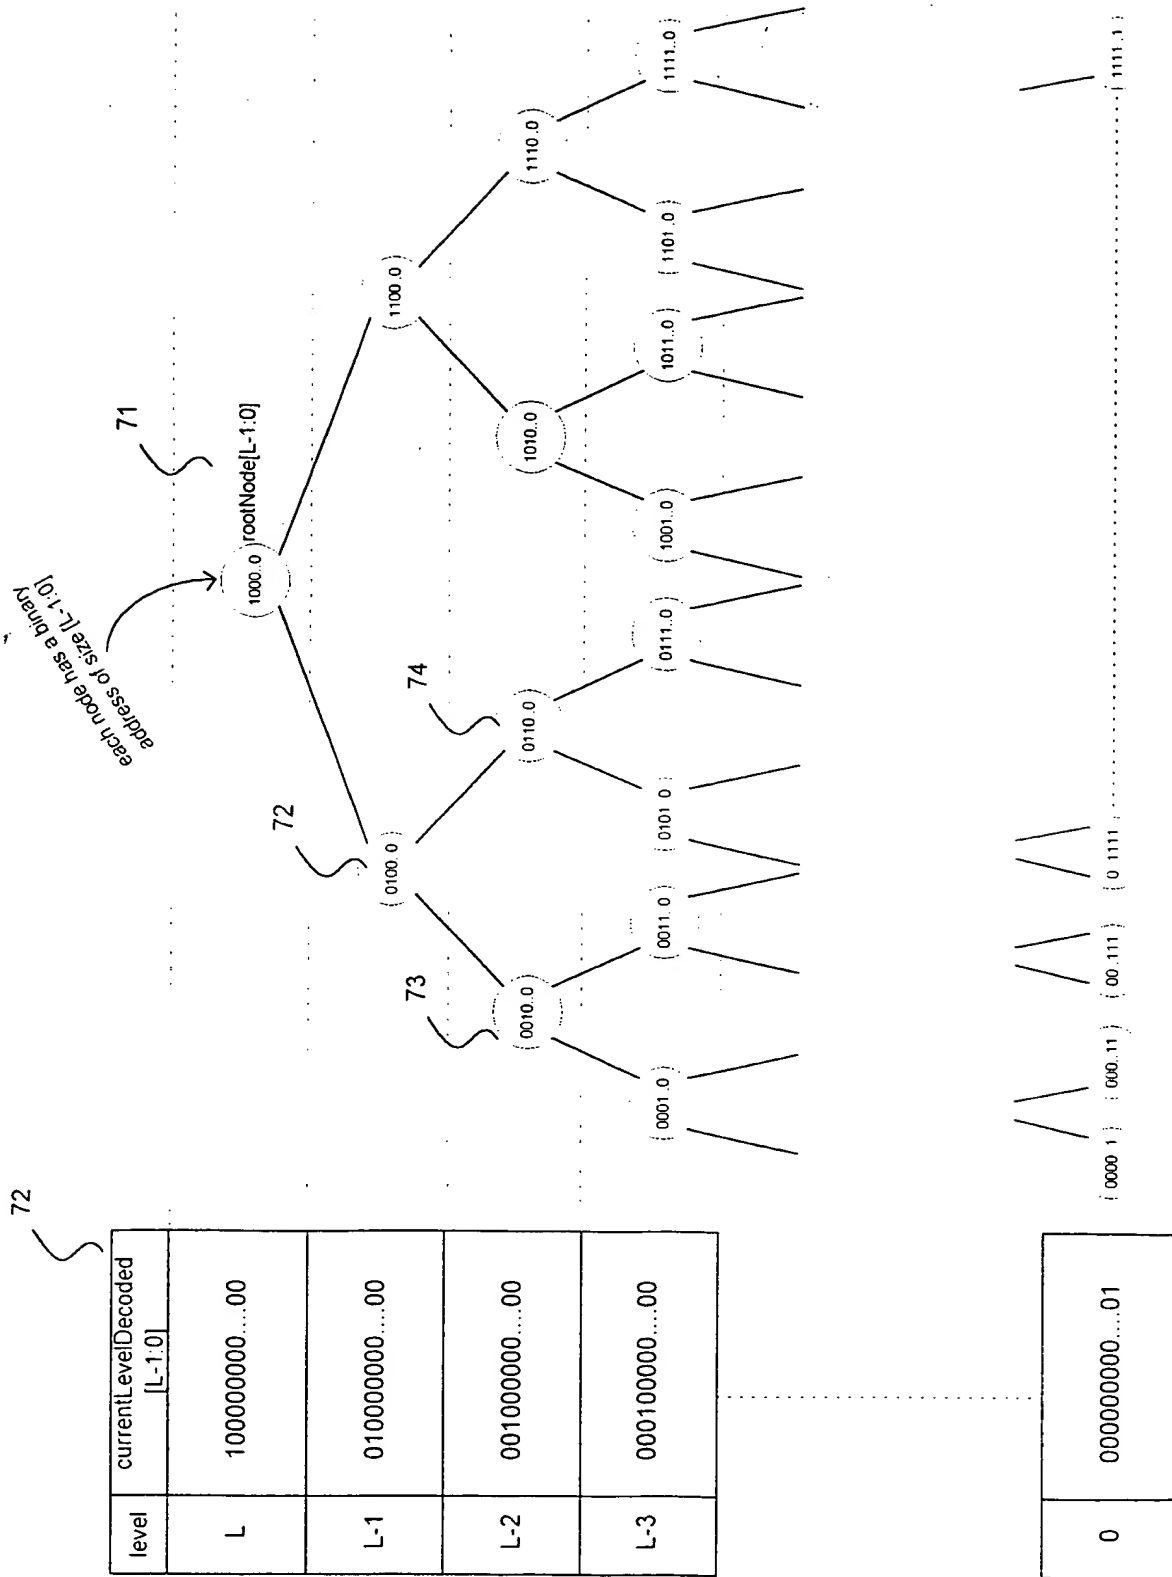


FIG.7

THIS PAGE BLANK (USPTO)

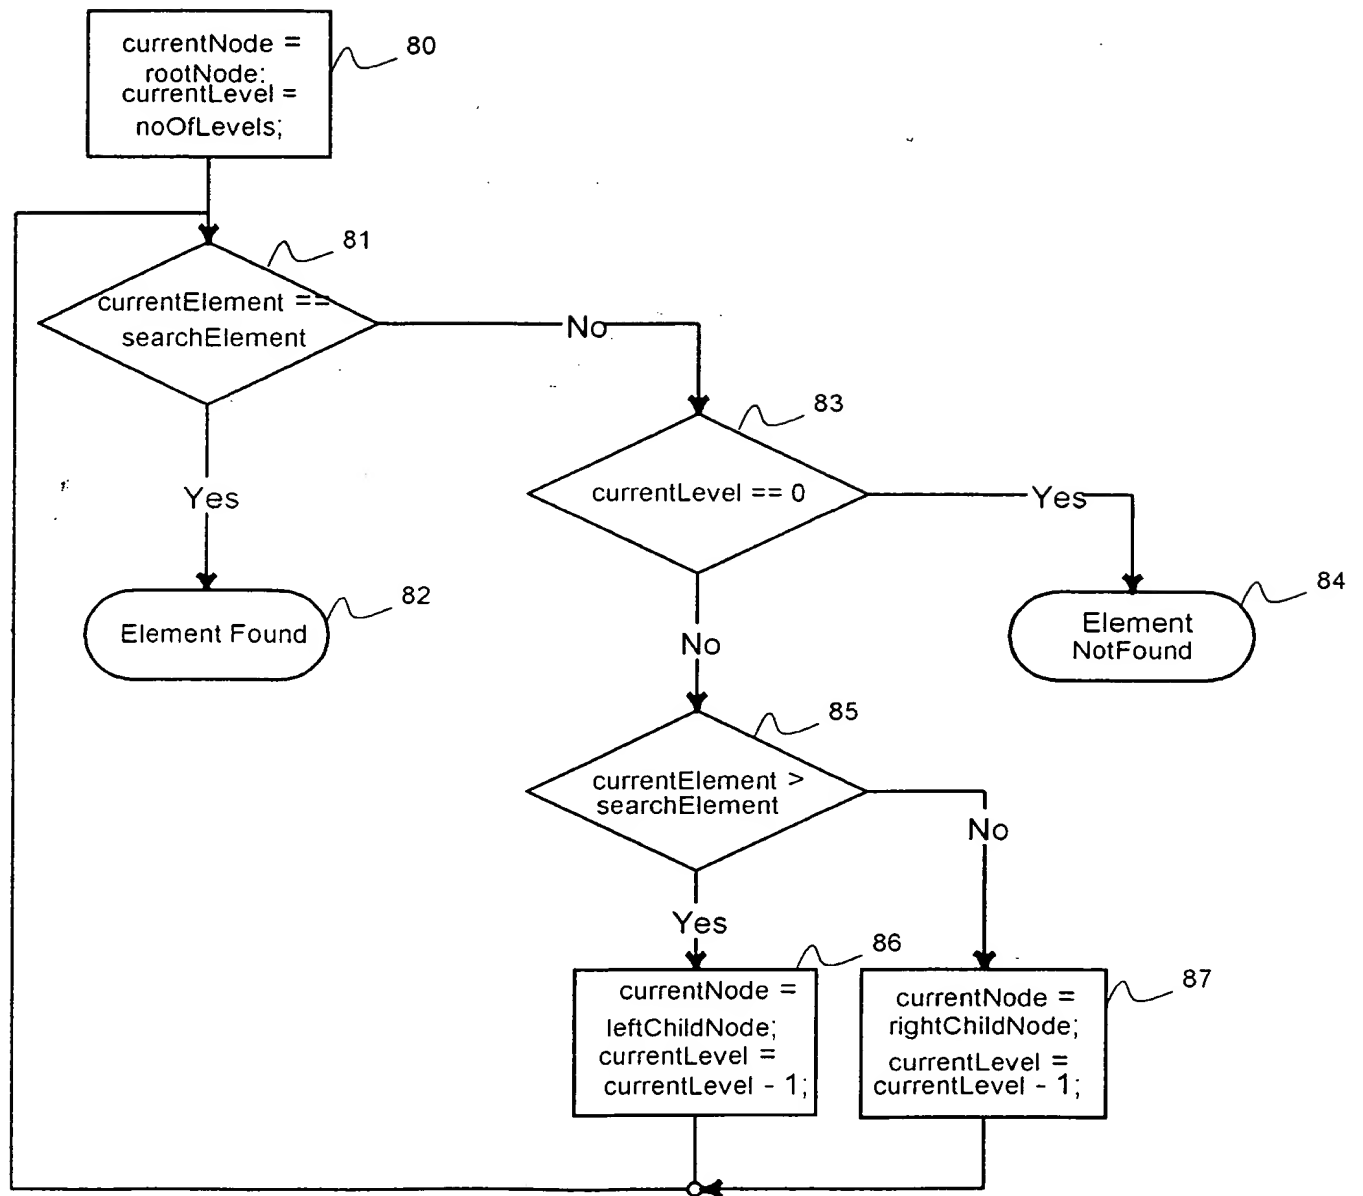


FIG.8

THIS PAGE BLANK (USPTO)

Neighbouring Node Locations

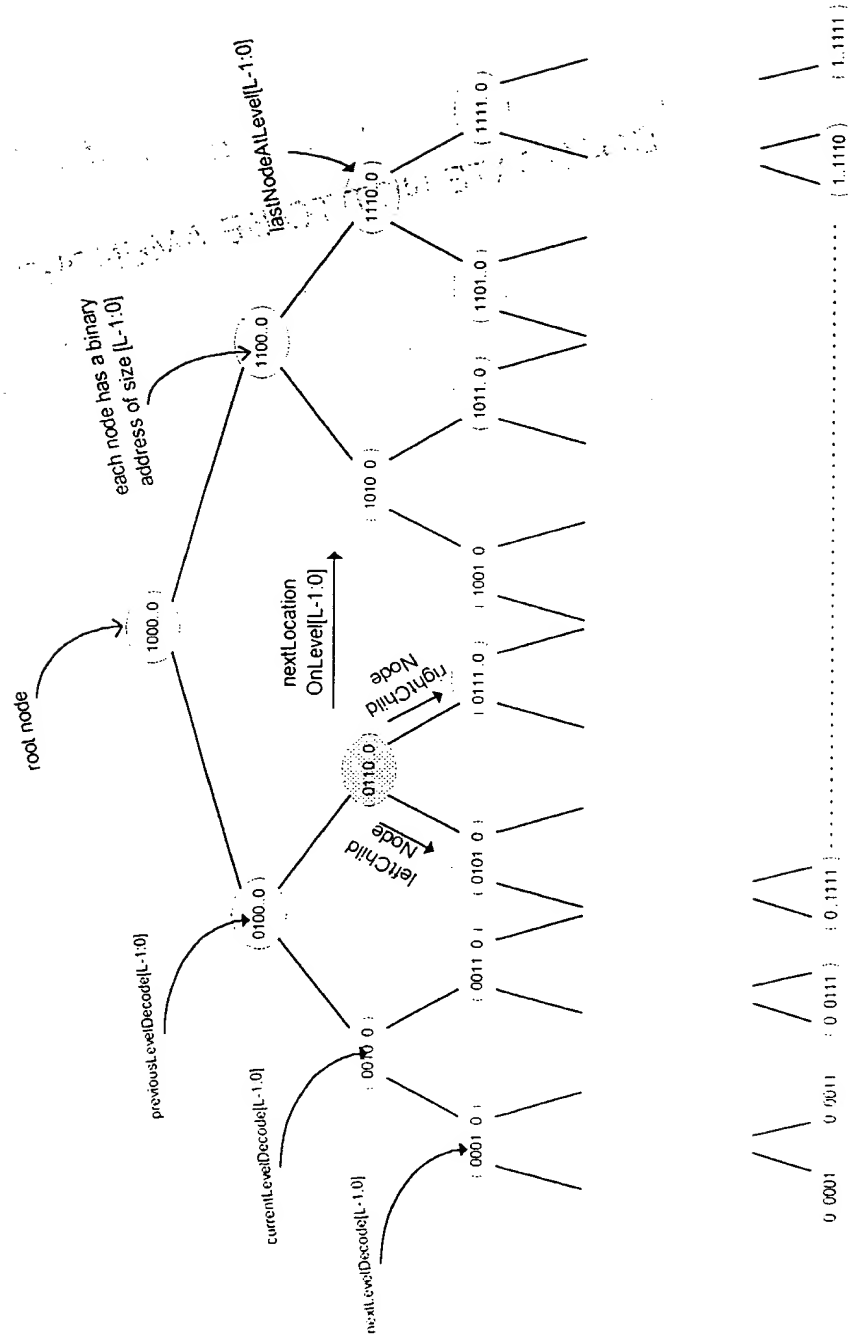


FIG.9

THIS PAGE BLANK (USPTO)

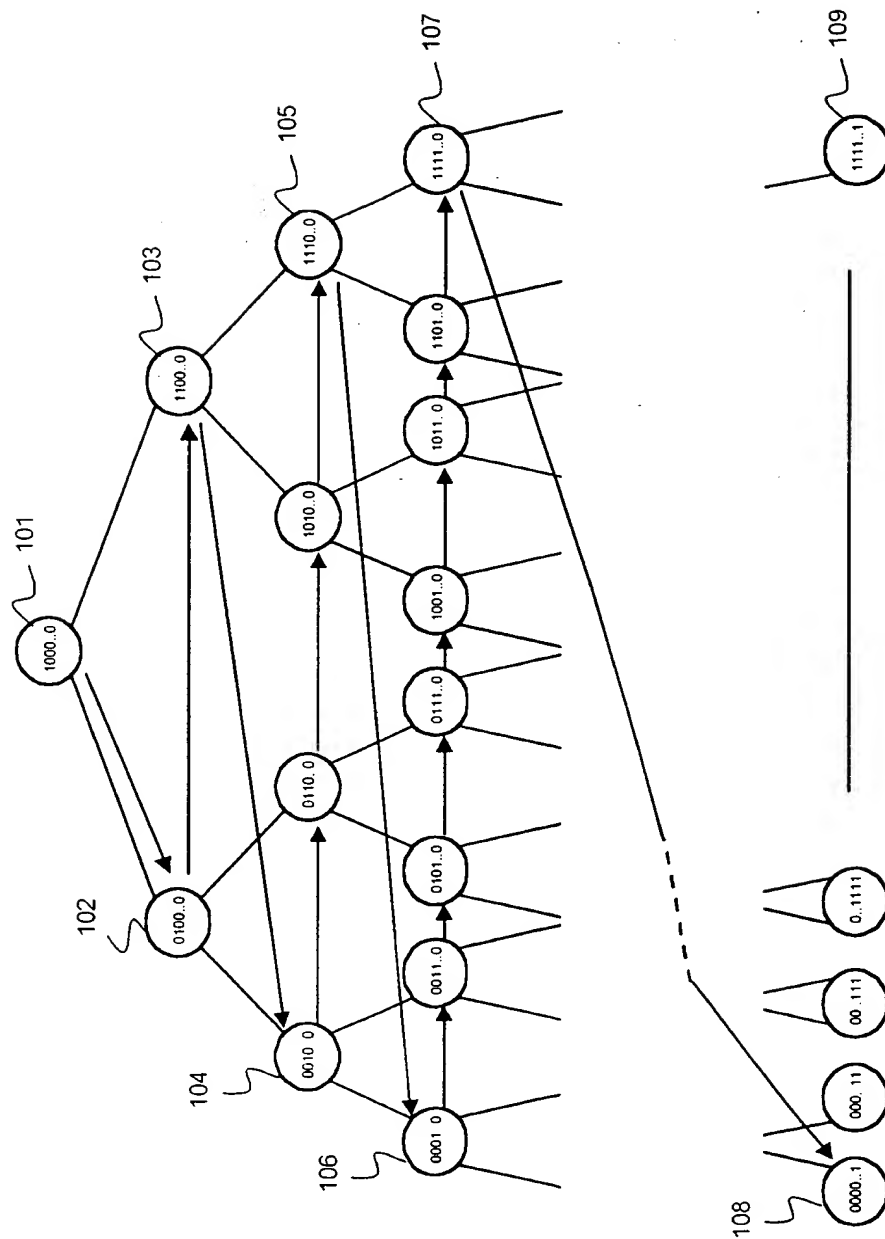


FIG.10

THIS PAGE BLANK (USPTO)

10/12

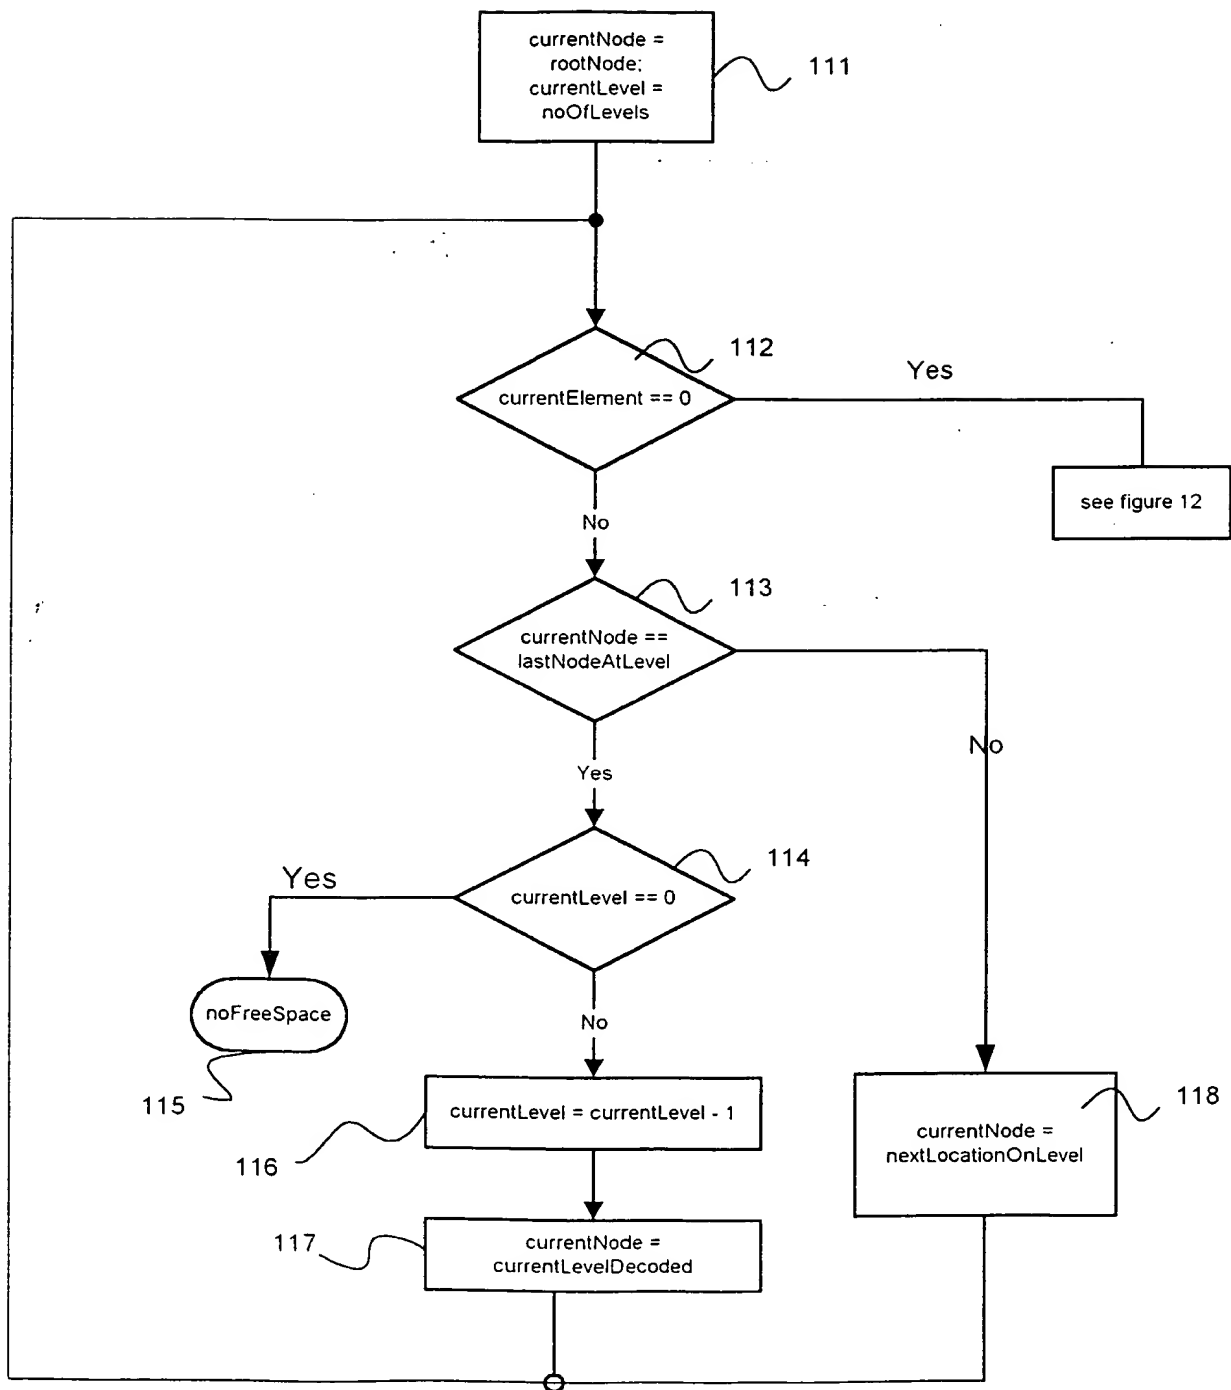


FIG.11

11/12

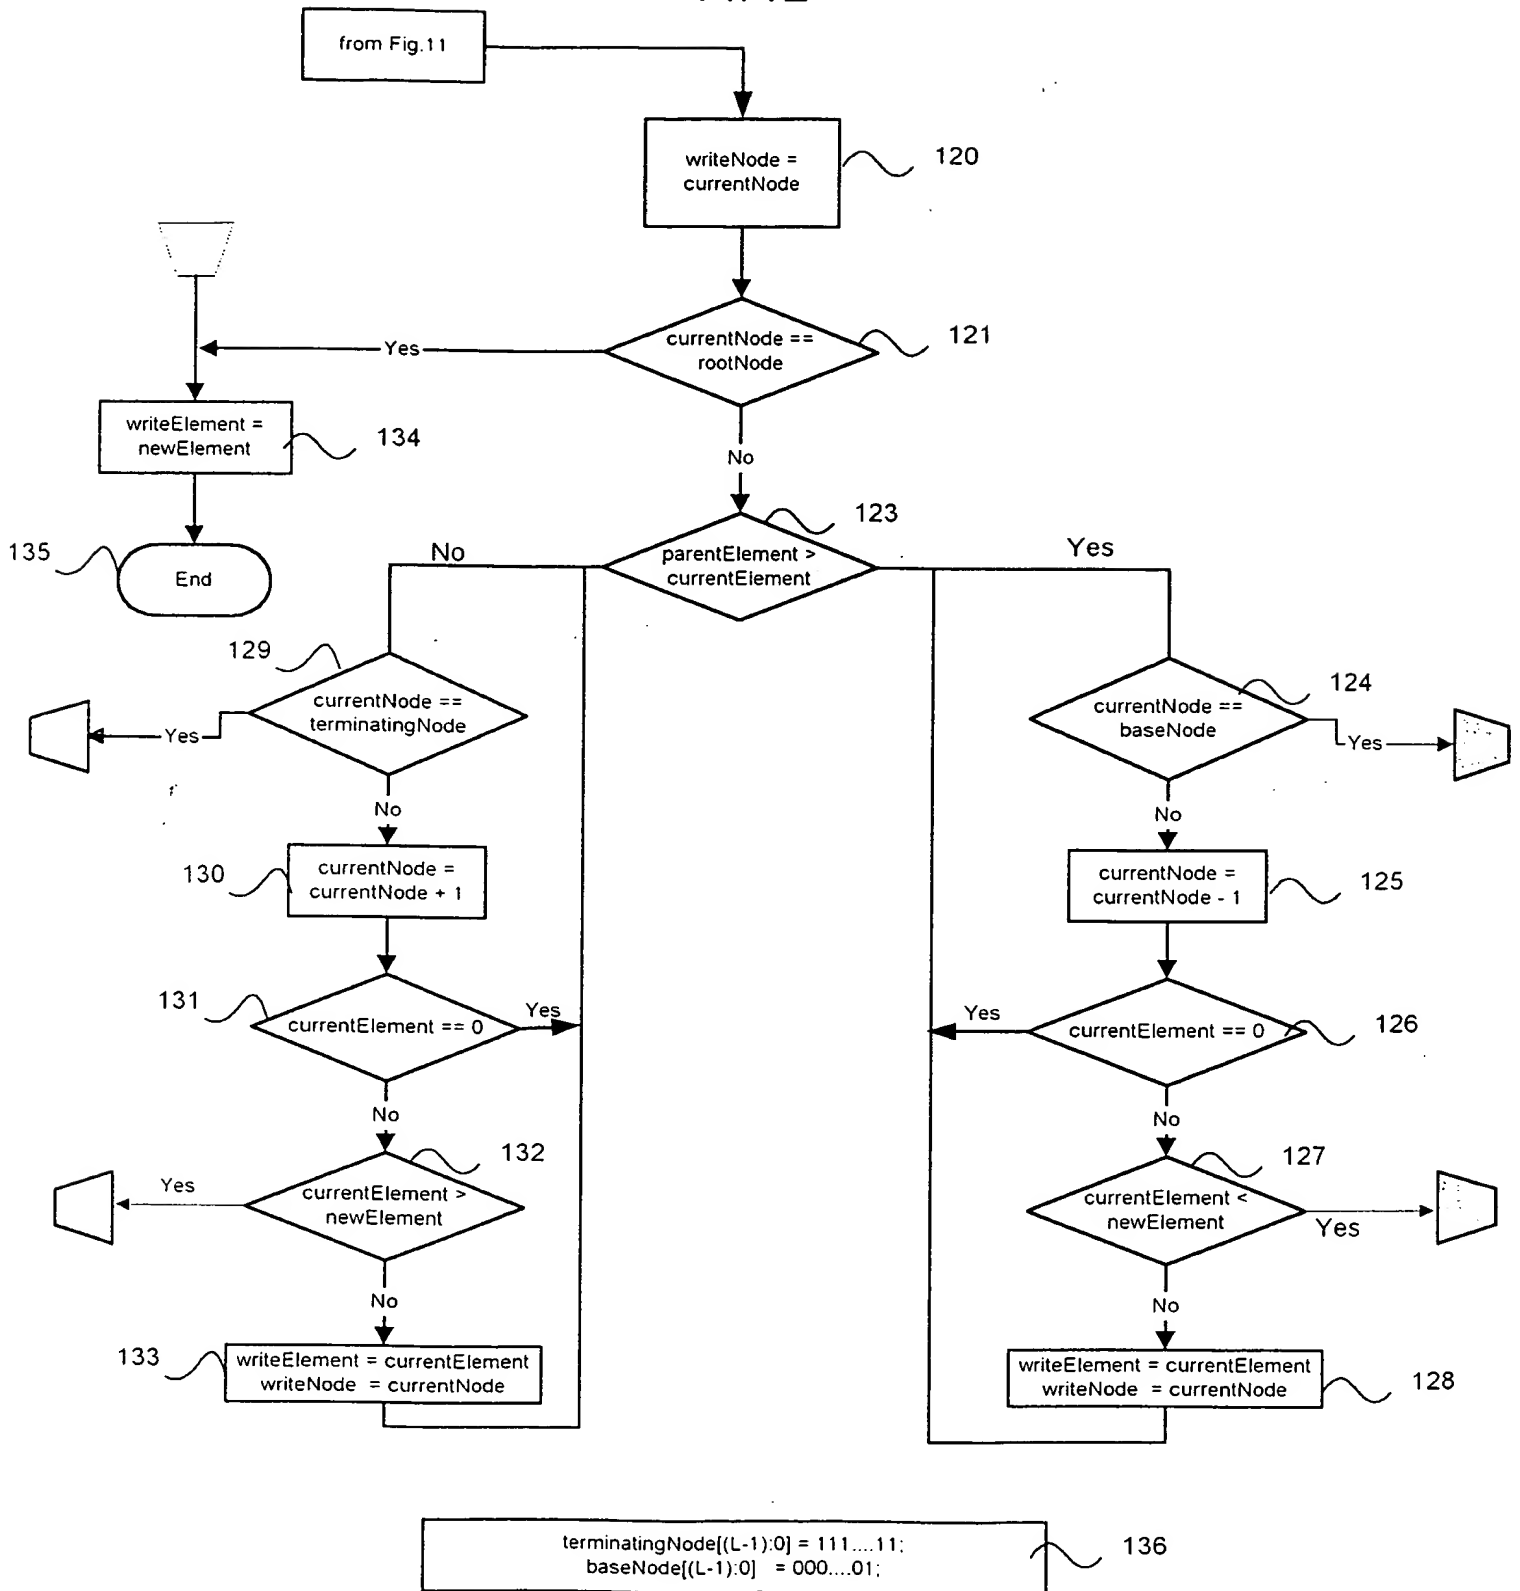


FIG.12

THIS PAGE BLANK (USPTO).

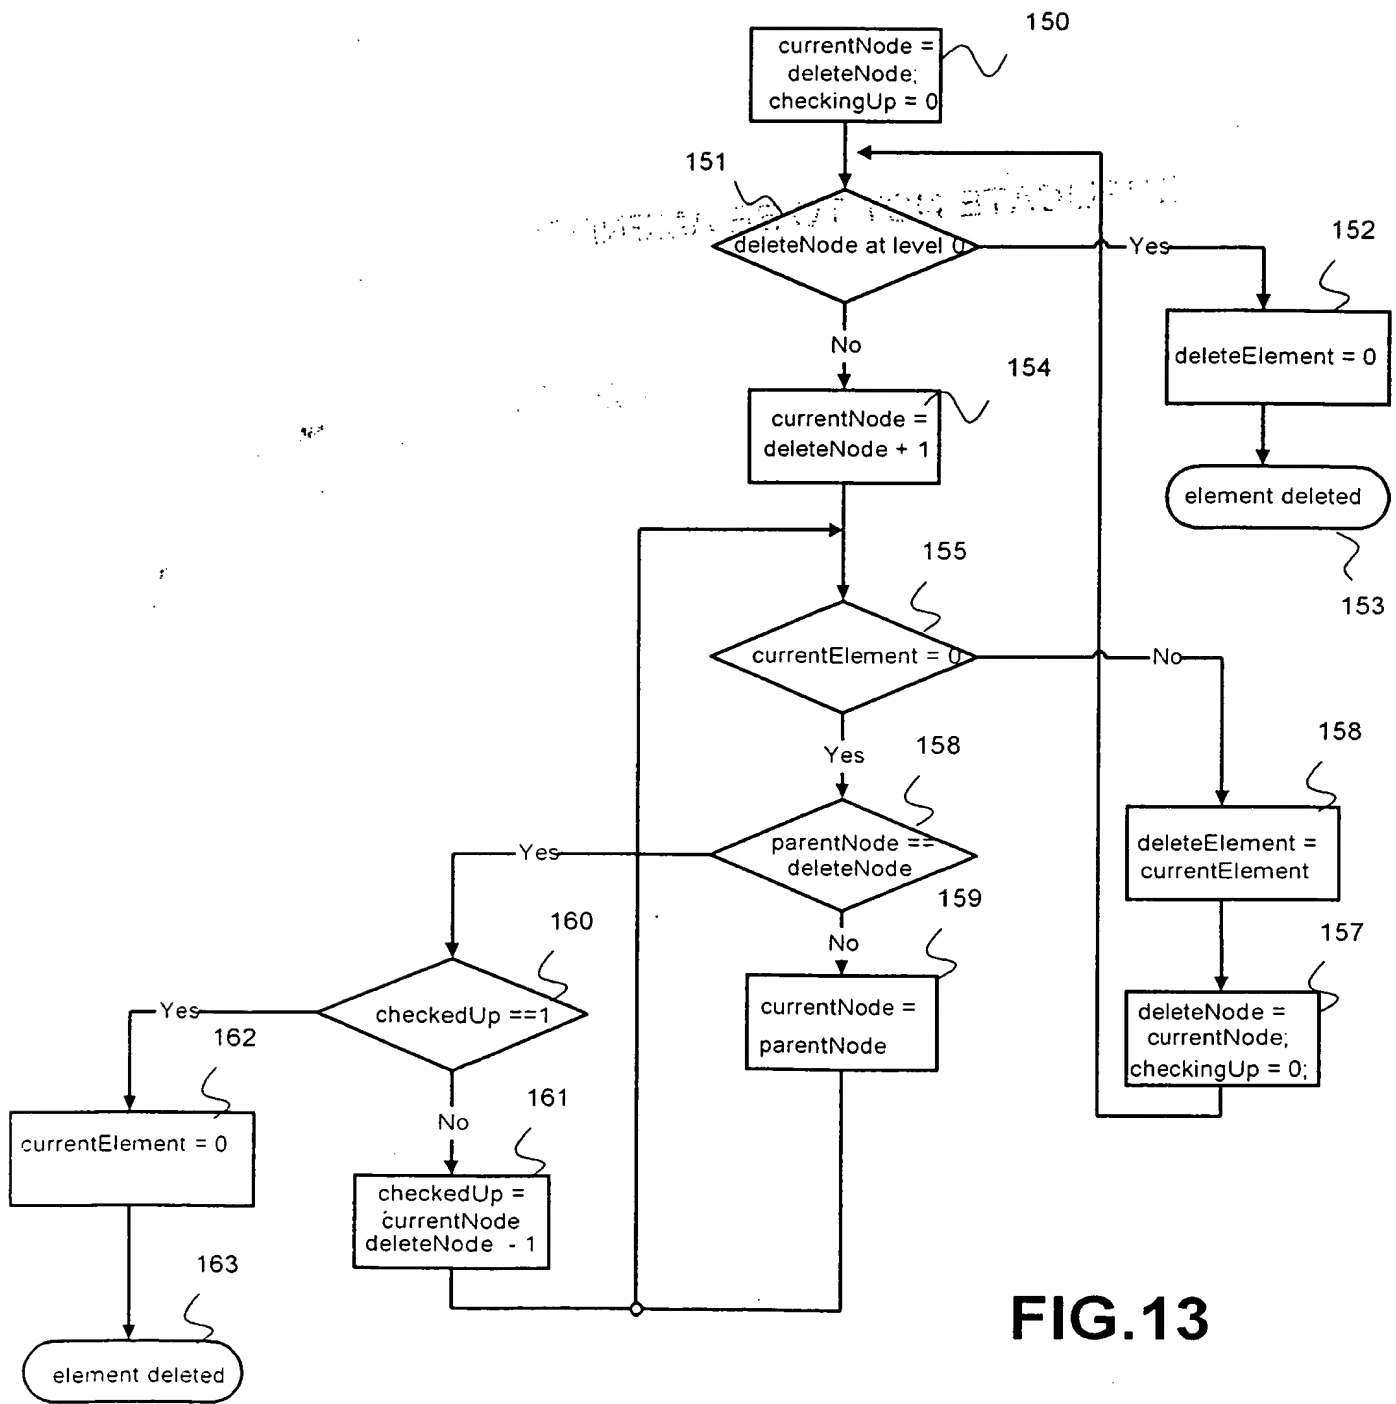


FIG.13

THIS PAGE BLANK (UBPTO)